

2W, Fixed input voltage, isolated & unregulated single output



CE Patent Protection RoHS

F_XT-2WR2 series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for

1. Where the voltage of the input power supply is stable (voltage variation: $\pm 10\%$ Vin);
2. Where isolation between input and output is necessary (isolation voltage ≤ 3000 VDC);
3. Where the output voltage regulation and the ripple & noise of the output voltage is not strictly required;
4. Typical application: preceding-stage interference isolation condition; ground-interference canceled condition; digit circuit condition; Voltage-isolation converting condition; normal low-frequency artificial circuit condition; relay drive circuit condition, etc.

FEATURES

- Operating temperature range: -40°C to +105°C
- High efficiency up to 84%
- Miniature SMD package
- Isolation voltage: 3K VDC
- No external component required
- International standard pin-out

Selection Guide

| Certification | Part No. | Input Voltage (VDC) | Output | | Efficiency (% Min./Typ.) @ Full Load | Max. Capacitive Load (μF) |
|---------------|--------------|---------------------|----------------------|--------------------------------|--------------------------------------|---------------------------|
| | | Nominal (Range) | Output Voltage (VDC) | Output Current (mA)(Max./Min.) | | |
| CE | F0505XT-2WR2 | 5 (4.5-5.5) | 5 | 400/40 | 75/79 | 220 |
| | F0509XT-2WR2 | | 9 | 222/22 | 78/82 | |
| | F0512XT-2WR2 | | 12 | 167/17 | 78/82 | |
| | F0515XT-2WR2 | | 15 | 133/13 | 79/83 | |
| | F1205XT-2WR2 | 12 (10.8-13.2) | 5 | 400/40 | 75/79 | |
| | F1212XT-2WR2 | | 12 | 167/17 | 78/82 | |
| | F1215XT-2WR2 | | 15 | 133/13 | 79/83 | |
| | F1224XT-2WR2 | | 24 | 83/8 | 80/84 | |
| | F1515XT-2WR2 | 15 (13.5-16.5) | 15 | 133/13 | 79/83 | |
| | F2405XT-2WR2 | | 5 | 400/40 | 75/79 | |
| | F2412XT-2WR2 | | 12 | 167/17 | 78/82 | |
| | F2415XT-2WR2 | | 15 | 133/13 | 79/83 | |
| | F2424XT-2WR2 | | 24 | 83/8 | 80/84 | |

Input Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit | |
|--|----------------------|------------------|--------|-------|------|--|
| Input Current (full load / no-load) | 5V Input | -- | 506/30 | --/60 | mA | |
| | 12V Input | -- | 212/25 | --/50 | | |
| | 15V Input | -- | 169/18 | --/35 | | |
| | 24V Input | -- | 105/15 | --/30 | | |
| Reflected Ripple Current | | -- | 15 | -- | mA | |
| Surge Voltage (1sec. max.) | 5V Input | -0.7 | -- | 9 | VDC | |
| | 12V Input | -0.7 | -- | 18 | | |
| | 15V Input | -0.7 | -- | 21 | | |
| | 24V Input | -0.7 | -- | 30 | | |
| Input Filter | | Filter capacitor | | | | |
| Hot Plug | | Unavailable | | | | |

Output Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|---|--------------------------------------|--------------|------|-------|-------|
| Output Voltage Accuracy | See tolerance envelope curve(Fig. 1) | | | | |
| Line Regulation | Input voltage change: ±1% | — | — | ±1.2 | — |
| Load Regulation | 10%-100% load | 5VDC output | — | 12 | — |
| | | 9VDC output | — | 9 | — |
| | | 12VDC output | — | 8 | — |
| | | 15VDC output | — | 7 | — |
| | | 24VDC output | — | 6 | — |
| Ripple & Noise* | 20MHz bandwidth | — | 100 | 200 | mVp-p |
| Temperature Coefficient | Full load | — | — | ±0.03 | %/°C |
| Short Circuit Protection** | | — | — | 1 | s |
| Note: *Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation; ** supply voltage must be discontinued at the end of short circuit duration. | | | | | |

General Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|------------------------------------|--|--|--|------|------|---------|
| Isolation Voltage | Input-output, with the test time of 1 minute and the leak current lower than 1mA | | 3000 | — | — | VDC |
| Isolation Resistance | Input-output, isolation voltage 500VDC | | 1000 | — | — | MΩ |
| Isolation Capacitance | Input-output, 100KHz/0.1V | | — | 20 | — | pF |
| Operating Temperature | 5V output | Derating if the temperature ≥71°C, (see Fig. 2) | -40 | — | 105 | °C |
| | Other output | Derating if the temperature ≥85°C, (see Fig. 2) | | | | |
| Storage Temperature | | | -55 | — | 125 | |
| Casing Temperature Rise | Ta=25°C, nominal input, full load output | | — | 25 | — | |
| Pin Welding Resistance Temperature | Welding spot is 1.5mm away from the casing, 10 seconds | | — | — | 300 | |
| Storage Humidity | Non-condensing | | — | — | 95 | %RH |
| Reflow Soldering Temperature | | | Peak temp.≤245°C, maximum duration time≤60s at 217°C. For actual application, please refer to IPC/JEDEC J-STD-020D.1. | | | |
| Switching Frequency | Full load, nominal input voltage | | — | 100 | — | KHz |
| MTBF | MIL-HDFK-217F@25°C | | 3500 | — | — | K hours |

Physical Specifications

| | | | |
|-----------------|-----------------------|--|--|
| Casing Material | Epoxy resin (UL94-V0) | | |
| Dimensions | 12.70*11.20*7.25 mm | | |
| Weight | 1.6g(Typ.) | | |
| Cooling Method | Free convection | | |

EMC Specifications

| | | | |
|-----|-----|-----------------|--|
| EMI | CE | CISPR22/EN55022 | CLASS B (see Fig. 4 for recommended circuit) |
| | RE | CISPR22/EN55022 | CLASS B (see Fig. 4 for recommended circuit) |
| EMS | ESD | IEC/EN61000-4-2 | Contact ±8KV perf. Criteria B |

Product Characteristic Curve

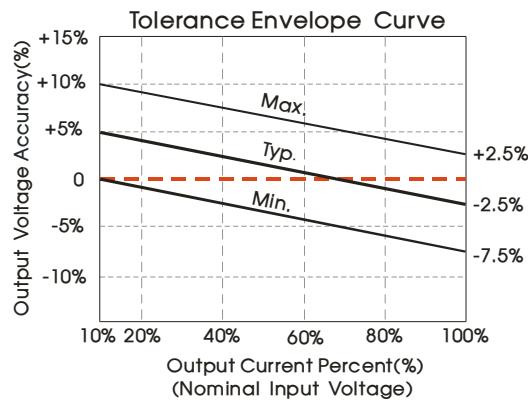


Fig. 1





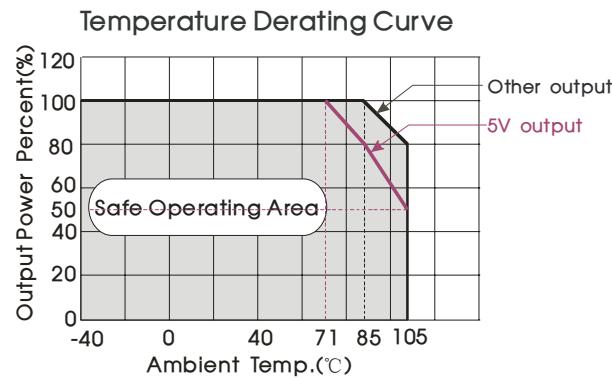


Fig. 2

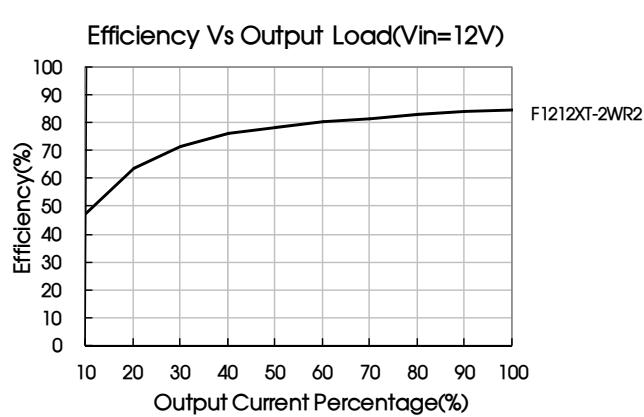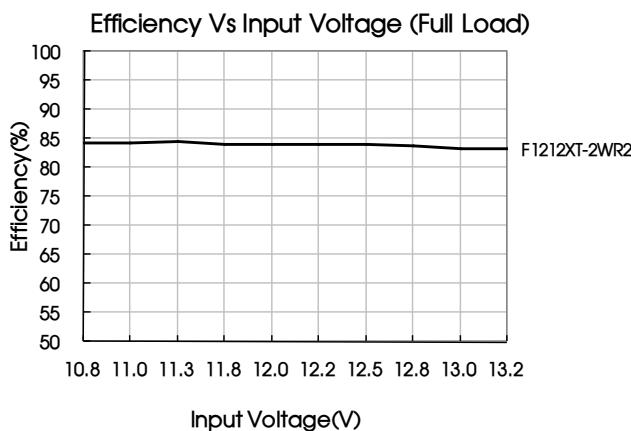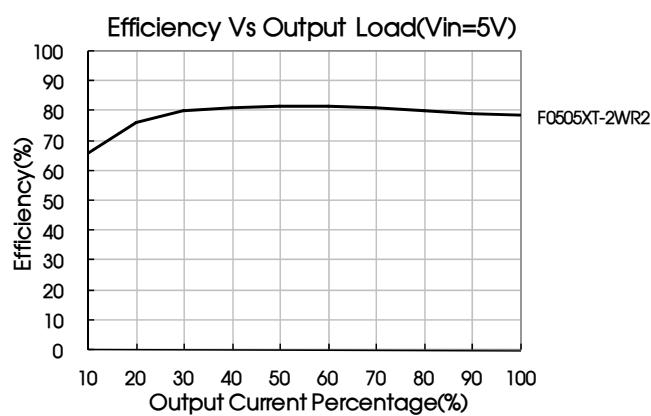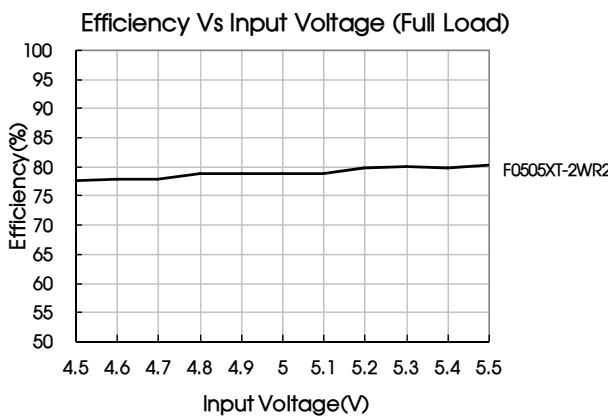

Design Reference

1. Typical application circuit

If it is required to further reduce input and output ripple, a filter capacitor may be connected to the input and output terminals, see Fig.3. Moreover, choosing a suitable filter capacitor is very important, start-up problems may be caused if the capacitance is too large. Under the condition of safe and reliable operation, the recommended capacitive load values are shown in Table 1.


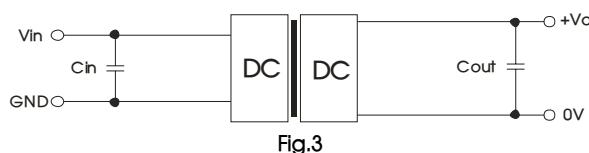


Fig.3

Recommended capacitive load value table (Table 1)

| Vin(VDC) | Cin(μF) | Vo (VDC) | Cout(μF) |
|----------|---------|----------|----------|
| 5 | 4.7 | 5 | 10 |
| 12 | 2.2 | 9 | 4.7 |
| 15 | 2.2 | 12 | 2.2 |
| 24 | 1 | 15 | 1 |
| - | - | 24 | 0.47 |

2. EMC solution-recommended circuit

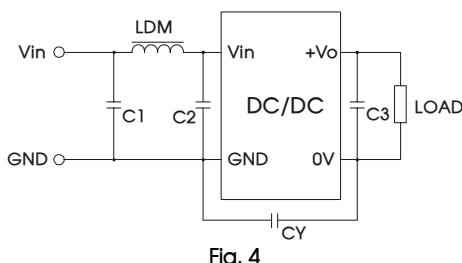

| | Input voltage (VDC) | 5/12/15 | 24 |
|-----|---------------------|----------------------------|---------|
| EMI | C1 | 4.7μF /50V | |
| | C2 | 4.7μF /50V | |
| | C3 | Refer to the Cout in Fig.3 | |
| | CY | -- | 1nF/3KV |
| | LDM | 6.8μH | |

Note: 1. 24V input series, 24V output series is subject to CY (CY : 1nF/3KV).
2. It is not needed to add the component in the peripheral circuit when parameter with the symbol of "-".


3. Output load requirements

When using, the minimum load of the module output should not be less than 10% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 10% dummy load in parallel at the output end, the dummy load is generally a resistor. Please note that the resistor needs to be used in derating.

4. For more information please find DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

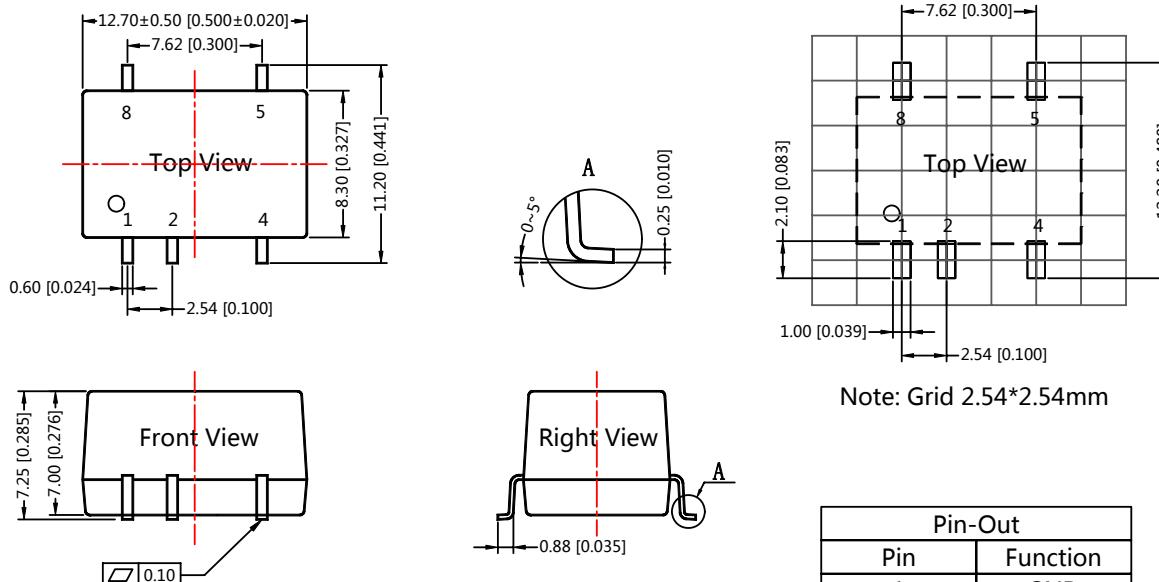

Note:

Unit: mm[inch]

Pin section tolerances: ±0.10[±0.004]

General tolerances: ±0.25[±0.010]

NC: No Connection

Notes:

1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com, Packing bag number: 58210024;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at nominal input voltage and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our Company's corporate standards;
6. The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above. Please contact our technicians directly for specific information;
7. We can provide product customization service;
8. Specifications are subject to change without prior notice.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn