




## ADAPTER-12W

# NP12-US<sub>TYPE</sub>

### DESCRIPTION:

- U.S.A / JAPAN / TAIWAN
- Wall Mount Type
- Meet CEC Regulations
- ROHS Compliance
- No Load Power Consumption  
Less than 0.3W

**Green Mode**

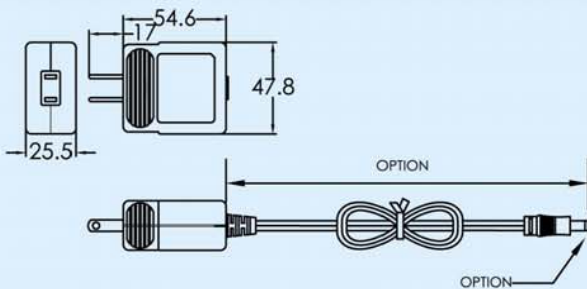

### MEET SAFETY:



### Dimensions:

LxWxH: 54.6x47.8x25.5 (mm)

Model	INPUT	OUTPUT	
NP12-US0320	90-264VAC (47-63HZ)	3V	2A
NP12-US03320		3.3V	2A
NP12-US0520		5V	2A
NP12-US0620		6V	2A
NP12-US0913		9V	1.3A
NP12-US1210		12V	1A

### GENERAL SPECIFICATIONS:

Maximum Output Power:	12W
Input Voltage:	90~264Vac
Input Frequency:	47Hz~63Hz
Input Current:	0.28A
Leakage Current (max):	0.25mA
Efficiency:	80%
Ripple Noise (max):	150mVp-p
Line Regulation:	±1%
Load Regulation:	±5%
Hold-Up Time:	10mS
Over Voltage Protection:	120%
Operating Temperature:	0~40°C
Ambient Humidity (operating):	20~90%RH
Storage Temperature:	-20~80°C
Storage Humidity:	10~95%RH
Withstand Voltage:	3Kv/min
Weight:	95g
Cable Type:	UL2468/18AWG or 20AWG