



**50mm L-PAD Attenuators Wire Wound Potentiometer**

**AT-50H**






**Part Number**

**AT-50H - B 4Ω, L - 20 KC**

Taper      Resistance Value      Shaft Type  
Shaft Length

**Dimensions**

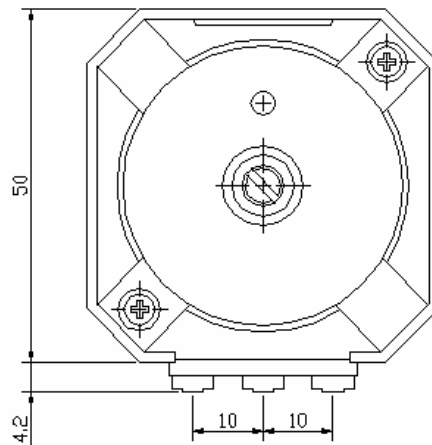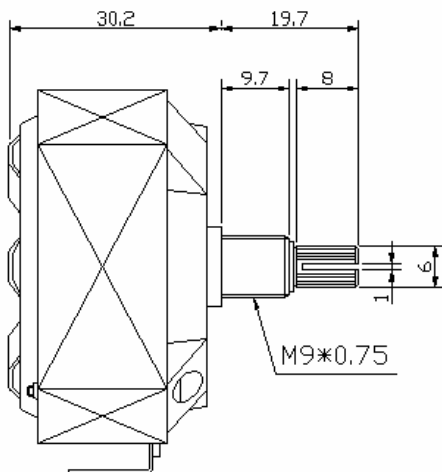



**50mm L-PAD Attenuators Wire Wound Potentiometer**

**MECHANICAL SPECIFICATION 性:**

1. ANGLE : 300°±5°
2. ROTATIONAL TORQUE : 50~300g/cm
3. NUT FASTENING STRENGTH : 10~12 kgf.cm
4. SHAFT ANTI ROTATION STRENGTH : 1 kgf over
5. ROTATIONAL LIFE : 15,000 cycles min

**ELECTRICAL SPECIFICATION :**

1. RATED POWER : 2dB/30W, 6dB/25W, 12dB/15W.
2. RESISTANCE TAPER : B TAPER
3. RESISTANCE TOLERANCE : ±20%
4. INSULATION RESISTANCE : over 100M ohm with DC500V put between the terminal and the shaft.
5. WITHSTANDING VOLTAGE : one minute against 50HZ 500V put between the terminal and the shaft.
6. TEMPERATURE RANGE : -10°~70°C degree
7. RESISTANCE RANGE : 4 ohm or 8 ohm  
ATTENUATION: 0-40 dB