
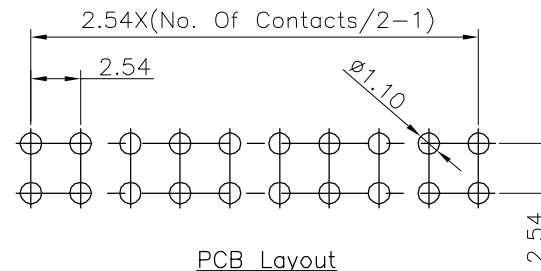

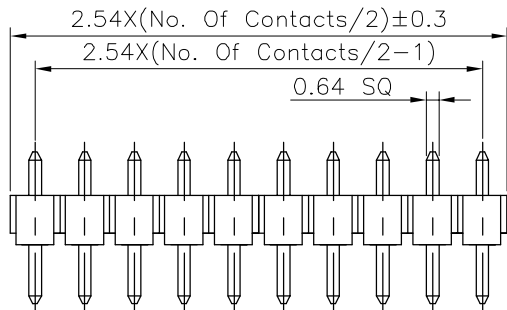




Specifications:  
 Current rating:3.0A AC/DC  
 Voltage rating:250V AC/DC  
 Contact resistance:20m ohm. max.  
 Insulation resistance:1000M ohm. Min.  
 Withstanding voltage:600V AC for one minute  
 Operating temperature range:-40°C to + 105°C

Material and Finish:  
 Insulator: PBT (UL94V-0)  
 Color: Black  
 Contact: Copper Alloy  
 Plating: Tin/Gold/Selective Gold Plated

How To Order  
 2213S-XXX-774  
 Total Length  
 T: Tin Plated  
 G: Gold Plated  
 SG: Selective Gold Plated  
 No. Of Contacts  
 Straight Type

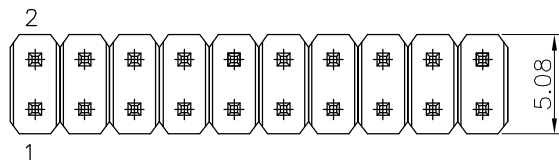

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 <b>Neltron Industrial Co., Ltd.</b>	SIZE
E			ALLEN	.X=±0.20 .XX=±0.15	DESCRIPTION: 2.54mm Pin Header Double Row Straight		
D			CHECKED:	UNIT: MM		PART NO: 2213S-XXX-774	<b>A4</b>
C			JERRY	SCALE: 1:1			
B	07-DEC-2020		MEI	APPROVAL:			
A	07-AUG-2008		ALLEN	RORY	PROJECTION:		
REV	DATE	FILE	BY				