


SECTION B-B 1:1



Specifications:

Current Rating:3.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20m ohm. max.  
 Insulation Resistance:1000M ohm. Min.  
 Withstanding Voltage:600V AC For One Minute  
 Operating Temperature Range: -40°C to +105°C  
 Material and Finish:  
 Insulator: High Temp. Plastic (Nylon 46 UL94V-0)  
 Insulator Color:Black  
 Contact: Copper Alloy  
 Finish:Gold Plated


How to order

2214S-XXG-36

Plastic Height 3.6mm  
 Gold Plated  
 No.of Contact  
 S: Straight

Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
4	5.08	2.54	24	30.48	27.94	44	55.88	53.34	64	81.28	78.74
6	7.62	5.08	26	33.02	30.48	46	58.42	55.88	66	83.82	81.28
8	10.16	7.62	28	35.56	33.02	48	60.96	58.42	68	86.36	83.82
10	12.70	10.16	30	38.10	35.56	50	63.50	60.96	70	88.90	86.36
12	15.24	12.70	32	40.64	38.10	52	66.04	63.50	72	91.44	88.90
14	17.78	15.24	34	43.18	40.64	54	68.58	66.04	74	93.98	91.44
16	20.32	17.78	36	45.72	43.18	56	71.12	68.58	76	96.52	93.98
18	22.86	20.32	38	48.26	45.72	58	73.66	71.12	78	99.06	96.52
20	25.40	22.86	40	50.80	48.26	60	76.20	73.66	80	101.6	99.06
22	27.94	25.40	42	53.34	50.80	62	78.74	76.20			

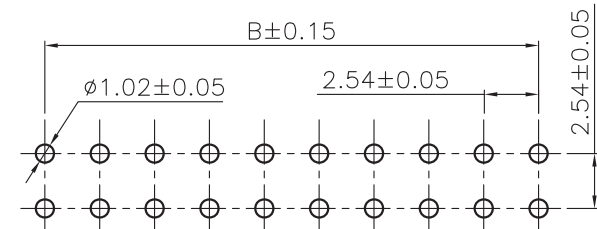

P.C.B. Layout

RoHS Compliant

REV	DATE	FILE	BY
E			
D			
C			
B	08-Jun-2009		Richie
A	28-May-2007		Mary

<b>DRAWN:</b> Mary	<b>GENERAL TOLERANCE:</b> .X=±0.2 .XX=±0.15
<b>CHECKED:</b> Jeremy Liu	
<b>APPROVAL:</b> Mike Wu	<b>PROJECTION:</b>

<b>Neltron Industrial Co., Ltd.</b>	
<b>DESCRIPTION:</b> 2.54mm PCB Socket Double Row Straight	<b>SIZE</b> <b>A4</b>
<b>PART NO:</b> 2214S-XXG-36	