
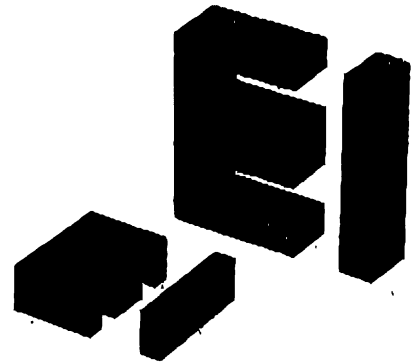





フェライトコア

EIコア

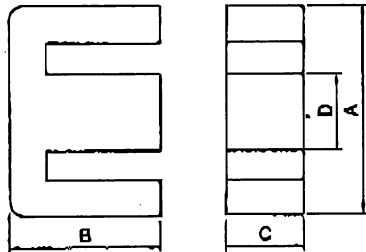

品名	AL-value* (nH/N²)±25% [μe]	寸法(mm)					Ae (mm²)	le (mm)	質量 (g)
		A	B	C	D	I			
PC40EI12.5-Z	1200 [1418]	12.4±0.3	7.4±0.1	4.85±0.15	2.4±0.1	1.5±0.1	14.4	21.3	1.9
PC40EI16-Z	1100 [1667]	16±0.3	12.2±0.2	4.8±0.2	4±0.2	2±0.2	19.8	34.6	3.3
HS72EI16-Z	2260 [3219]								
PC40EI19-Z	1400 [1825]	20±0.3	13.55±0.25	5±0.2	4.55±0.15	2.3±0.1	24	39.6	5.1
HS72EI19-Z	2730 [3539]								
PC40EI22-Z	2400 [1796]	22±0.3	14.55±0.25	5.75±0.25	5.75±0.25	4.5±0.2	42	39.3	9.8
PC40EI22/19/6-Z	2000 [1800]	22±0.4	14.7±0.2	5.75±0.25	5.75±0.25	4±0.2	37	41.8	8.5
HS72EI22/19/6-Z	3800 [3408]								
PC40EI25-Z	2140 [1962]	25.3±0.5	15.55±0.25	6.75±0.25	6.5±0.3	2.7±0.2	41	47	9.8
HS72EI25-Z	4260 [3885]								
PC40EI25.4/19/6.35-Z	1860 [1789]	25.4±0.4	15.85±0.3	6.35±0.25	6.35±0.3	3.2±0.2	40	48.1	10
HS72EI25.4/19/6.35-Z	4060 [3845]								
PC40EI28-Z	4300 [1960]	28±0.5	16.75±0.25	10.6±0.2	7.2±0.3	3.5±0.3	86	48.2	22
PC40EI30-Z	4690 [1960]	30±0.4	21.25±0.25	10.7±0.3	10.7±0.3	5.5±0.2	111	58	34
PC40EI33/29/13-Z	4400 [2005]	33±0.5	23.75±0.25	12.7±0.3	9.7±0.3	5±0.3	118.5	67.5	41
HS72EI33/29/13-Z	9860 [4472]								
PC40EI35-Z	3800 [2011]	35±0.5	24.25±0.26	10±0.3	10±0.3	4.8±0.3	101.4	67.1	36
HS72EI35-Z	8450 [4451]								
PC40EI40-Z	4860 [2023]	40±0.5	27.25±0.25	11.65±0.35	11.65±0.35	7.5±0.3	148	77	60
PC40EI44/37/15-Z	5460 [1977]	44±0.6	30.25±0.25	15±0.3	11.7±0.3	7±0.3	192	86.9	85
PC40EI50-Z	8110 [1997]	50±0.7	33.35±0.35	14.6±0.4	14.8±0.4	9±0.3	230	94	115
PC40EI60-Z	5670 [2001]	60±0.8	35.85±0.35	15.6±0.4	15.6±0.4	8.5±0.3	247	109	139

*1kHz, 0.5mA-100t ●エアギャップ付きコアも製作いたします。